

Part Number: 2-2144-052



Operating Specifications	
Operating Range	1*10 <sup>-11</sup> Torr to 1*10 <sup>-2</sup> Torr
Analog Output	Controller-dependent
Supply Voltage	Controller-dependent
<b>Mounting Orientation</b>	Any
Calibration Medium	Dry air or nitrogen
Overpressure	150 PSI
Analog Output Resolution	Controller-dependent
Operating Temperature	0 °C to +50 °C
Storage Temperature	-20 °C to +70 °C
Bakeout Temperature	400 °C (without magnets) 150 °C (with magnets)
Response Time	≤ 10 ms
Accuracy	
1*10 <sup>-9</sup> to 1*10 <sup>-2</sup> Torr	±0.2 decade

Physical Characteristics	
<b>Electrical Connections</b>	SHV5
Weight	572 g (1.26 lbs)
Dimensions	See dimensional drawings

#### **Key Features and Benefits**

- Cleanable design for extended use
- · Resistant to inrushes of gas
- High bakeout temperature
- Improved sensitivity when compared to Penning Magnetrons
- Mountable in any orientation
- Minimal stray magnetic field
- Interchangeable with 7E, 7FC, and 7FCS

## **Applications and Industries**

- Medical particle accelerators
- National labs, research and development
- Semiconductor
- Thin film deposition

Ordering Information		
Part Number	Description	
2-2144-052	CF40/2.75" CF-F Stainless Steel	
Compatible Vacuum Controllers		

Part Number	Description	
2-7900-034	MX200 Vacuum Controller RS-232/RS-485/USB	
2-7900-037	MX200 Vacuum Controller EthernetIP/USB	


# **Click to Buy Online from Fredericks Now!**

#### Description

The 7F cold cathode vacuum gauge has a measurement range from  $1*10^{-11}$  Torr up to  $1*10^{-2}$  Torr. It indirectly measures absolute pressure by ionizing gas in the presence of a magnetic field. Unlike hot filament sensors, the 7F is resistant to inrushes of gas. The design of this sensor allows for an extended range of measurement and high bakeout temperatures up to 400 °C.

The 7F can be operated by the Televac® MX200 vacuum controller This controller will automatically operate the cold cathode to provide a full range vacuum measurement solution when the 7F is used in conjunction with rough vacuum sensors like the 2A thermocouple or 4A convection.

## **Analog Output Behavior**

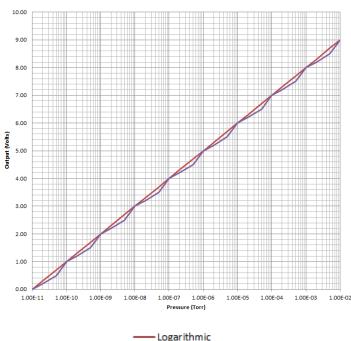

---- Logarithmic
----- Linear by Decade

#### **Materials Exposed to Vacuum**


Stainless Steel Ceramic

## **Ratings and Compliance**

• RoHS complaint


sales@frederickscompany.com +1 215 947 2500 www.frederickscompany.com 7f\_ds rev A Page 1 of 2







#### **Dimensional Drawing**

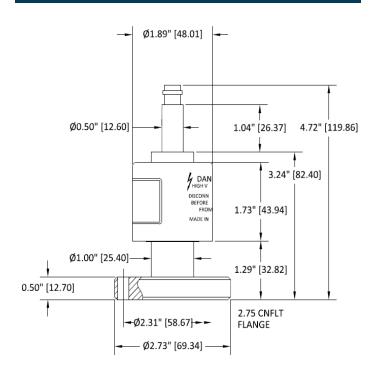

#### **Additional Documentation**

AN3010 Torr Scientific/Torr Decimal/mTorr/Micron Conversions
AN3015 Recommended Practices for Vacuum Calibration
AN3020 Vacuum Terminology Reference

Resource Televac® Tolerances

#### **Company Information**

#### Specialty manufacturing services that promise precision -

Since 1935, Fredericks has specialized exclusively in tilt and vacuum measurement products. Today, our precise manufacturing processes produce the most accurate and advanced products on the market, ensuring perfection every time. A true specialty service provider, we are willing and eager to put our experience and capabilities to good use, helping OEMs achieve even the most complex designs.

#### High performance products designed and manufactured with pride -

Fredericks is a global provider and U.S. manufacturer and designer of high-performance tilt and vacuum measurement products. Built to last, our products are made with state-of-the-art sensing technology, proven processes, and an intrinsic passion for the trade. Offering simple integration and quality and safety benchmarks, our customers benefit not just from standard-setting reliability, but from our commitment to competitive pricing and performance.

### A partnership that prioritizes uptime, lead time, and service -

Fredericks guarantees customer satisfaction and our 'not too big, not too small' operation is what enables us to offer a true partnership experience. Our dedicated representatives and engineers offer exceptionally responsive service and some of the fastest lead times in the industry, knowing that uptime is the key to your success. With anytime-access to our leadership team and solutions that enhance your products, you will feel the Fredericks difference.

#### Vacuum measurement tools built for the toughest jobs -

Fredericks' world-class vacuum sensors, gauges, and control instrumentation are engineered for the most demanding applications and environments. Our patented Televac® and ETI vacuum brands feature cold-cathode technology, thermocouple and convection gauges, and precision-manufactured hot ionization gauges. Dedicated solely to vacuum gauging and calibration services, we provide industrial heating, national laboratories, cryogenics, and industrial gas applications, among many others, with fast lead times and industry-leading performance. Covering the entire practical vacuum range, our products deliver rapid response vacuum readings and sensitivity.

## **Contact Us**

The Fredericks Company 2400 Philmont Avenue Huntingdon Valley, PA 19006

tel: +1 215 947 2500

fax: +1 215 947 7464 email: sales@frederickscompany.com web: www.frederickscompany.com

Disclaimer: Specifications subject to change without notice. The Fredericks Company assumes no responsibility for inaccuracies in product specifications or any liability arising from product use.

© 2022 The Fredericks Company

sales@frederickscompany.com +1 215 947 2500 www.frederickscompany.com 7f ds rev A Page 2 of 2